

Ceiling mount bracket for low ceilings

**Description**

This ceiling mount bracket is to be used when mounting projectors to low ceilings.

**Specifications**

Vertical correction angle: +5°, -17°  
 Horizontal slant correction angle: ±2.5°  
 Horizontal turn correction angle: ±1.2°  
 Dimensions (W × H × D): 367 × 109 × 407.5 mm (14-7/16 × 4-9/32 × 16-1/32 inches)  
 Weight: 5.9 kg\* (13.0 lbs)\*  
 Applicable projectors: PT-DZ770K/DZ770LK/DZ770S/DZ770LS/DW740S/DW740LS/DW740K/DW740LK/DW730S/DW730LS/DW730K/DW730LK/DX810S/DX810LS/DX810K/DX810LK/DX800S/DX800LS/DX800K/DX800LK/DZ680K/DZ680LK/DZ680S/DZ680LS/DW640K/DW640LK/DW640S/DW640LS/DX610K/DX610LK/DX610S/DX610LS/DZ6710/DZ6710L/DZ6700/DZ6700L/DW6300S/DW6300LS/DW6300K/DW6300LK/D6000S/D6000LS/D6000K/D6000LK/D5000S/D5000LS

\* Average value. May differ depending on models.

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice.


<b>Parts</b>	Attachment plate . . . . .	1	Washer-fitted screws for safety fitting (M4 × 8) . . . . .	4
	Angle adjuster . . . . .	1	Washer-fitted hexagonal bolts (M6 × 14) . . . . .	15
	Projector mount bracket . . . . .	1	Drop prevention kit . . . . .	1
	Safety fitting . . . . .	2		

**Caution:**

- Mounting should be done by a qualified technician.
- Make sure that the mounting (ceiling) area has sufficient strength.
- Read the enclosed mounting instructions thoroughly before starting.
- Do not use an electric screwdriver or impact driver to tighten screws. (Use a torque driver or similar tool.)
- When the product is no longer going to be used, have it disposed of quickly by a professional disposal service.

**Dimensions**

Illustration shows the bracket attached to a projector.

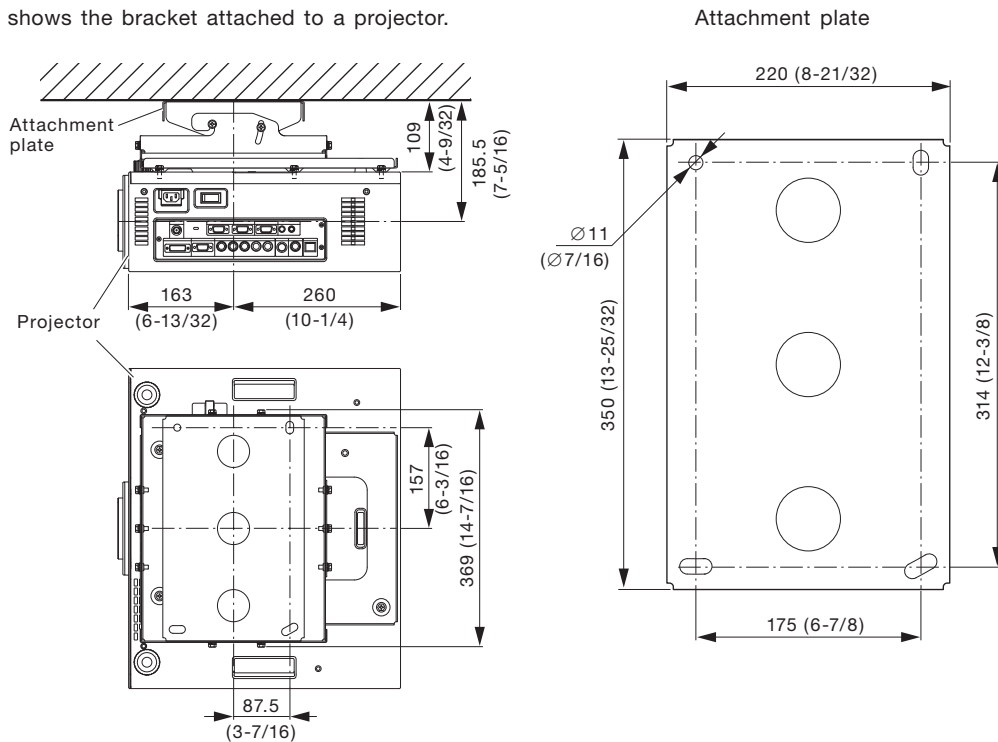

unit : mm (inch)  
 NOTE: This illustration is not drawn to scale.