

This module is to be mounted onto a PT-DZ570 series or other Panasonic projector when using the wireless function.

Specifications

Power supply:	Supplied from the projector.
Standard:	IEEE 802.11b/g/n
Modulation:	Direct sequence spread spectrum (DSSS) system, Orthogonal frequency division multiplex (OFDM) system
Transmission speed (standard)*1:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n: Up to 150 Mbps
Frequency range (channel):	2,412–2,472 MHz (1–13 ch)
Access method:	Infrastructure mode, ad-hoc mode*2
Security:	WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES), WEP (128 bit/64 bit) When mounted on the PT-FW430/FX400: PEAP (MS-CHAPv2), PEAP (GTC), EAP-TTLS (MD5), EAP-TTLS (MS-CHAPv2), EAP-FAST (MS-CHAPv2), EAP-FAST (GTC), EAP-TLS
Antenna:	Tx 1, Rx 1
Interface:	USB 2.0 (Cannot be used with any projector other than a Panasonic projector with ET-WM200 compatibility.)
Dimensions (W × H × D):	23 × 9 × 63 mm (29/32" × 11/32" × 2-15/32")
Weight:	Approx. 10 g*3 (0.4 ozs*3)
Operating environment*4: Temperature:	0°– 45°C (32°–113°F)
Humidity:	20%–80% (no condensation)

Supplied accessory

Wireless Manager ME 5.5	CD-ROM × 1
-------------------------	------------


*1 This is a theoretical speed. The actual transfer speed varies depending on the usage environment and connected devices.

*2 Not supported by IEEE 802.11n.

*3 Average value. May differ depending on models.

*4 Conforms to the environmental conditions of the mounted projector.

Dimensions

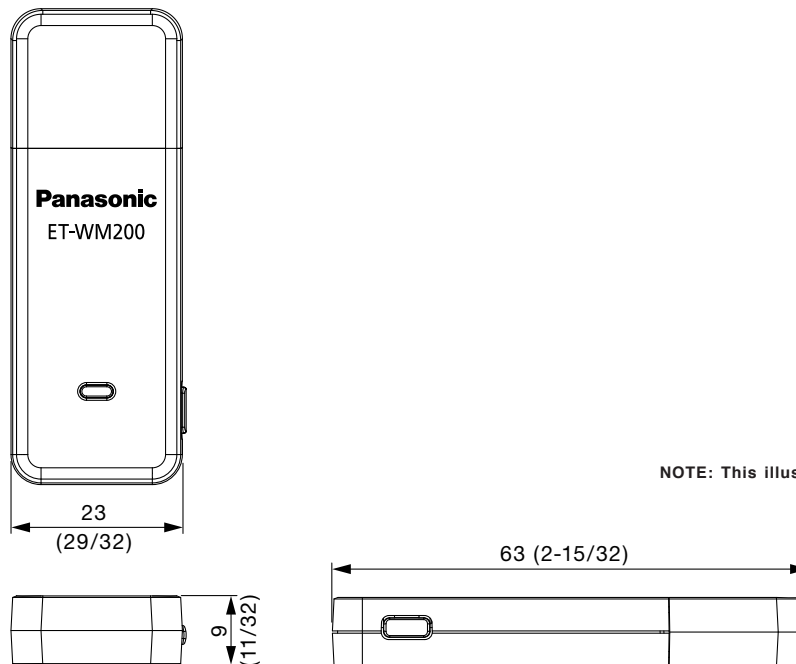

Weights and dimensions shown are approximate. Specifications subject to change without notice.